

WORKiO – Options & Specifications



Hard Disk

Hard Disk Drive Unit
DA-HD30
(Optional Image Memory is required)

Image Memory Options

16MB / 64MB / 128MB
DA-SM16B / DA-SM64B / DA-SM28B

Fax / Scan-to-Email (Internet Fax) Options

Flash Memory 4MB Flash Memory / 8MB Flash Memory
UE-410047F/UE-410048F

Exit Tray (Inner)

DA-XN200

Paper Exit Options

Software

Accounting System

Accounting Software
DA-WA10
(Optional Hard Disc Drive Unit and
Optional Image Memory are required)

DD Server System

DD Server Software
DA-WS20
(Network Scanner Module option is required)

1-Bin Finisher

DA-FS300

Exit Tray (Outer)

DA-XT200

G3 Fax

Fax Communication Board

DA-FG300

Scan-to-Email (Internet Fax)

Internet Fax/Email Module

DA-NF600

Expansion F-ROM Board

DA-EM600F

Printer / Network Printer Options

Printer Controller Module

DA-PC300

PCL Printer

Multi Page Description Language Controller Module

DA-MC300

PS/PCL Printer

Network Scanner Option

Network Scanner


Network Scanner Module

DA-NS600


Paper Feed Options

Full-Height Configurations

2-Paper Tray Configuration

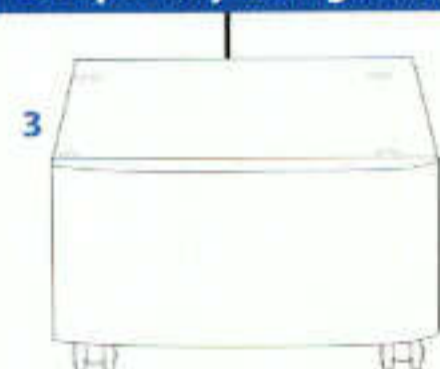

3-Paper Tray Configuration

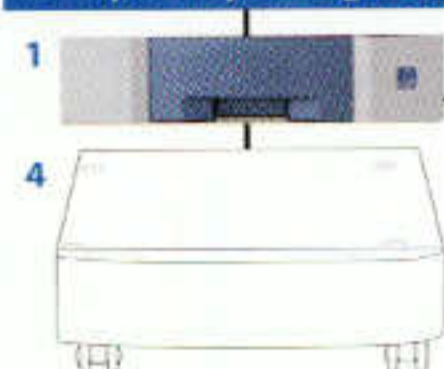


4-Paper Tray Configuration




For Wheelchair Configurations

2-Paper Tray Configuration

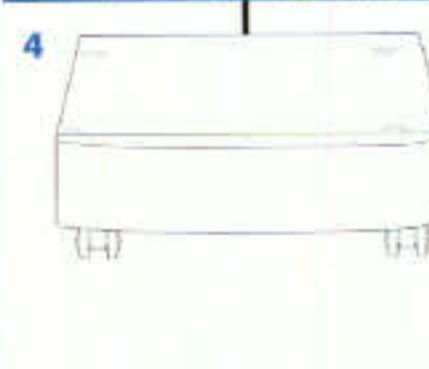

3-Paper Tray Configuration

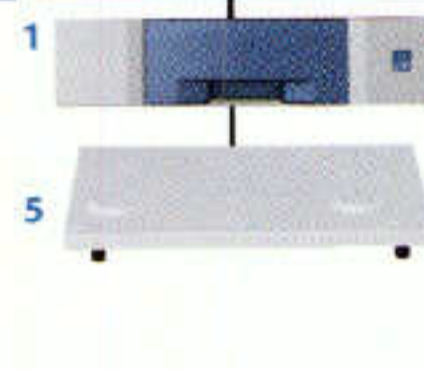

- 1- 3rd Paper Tray DA-DS303
- 2- 4th Paper Tray DA-DS304
- 3- Plain Stand (High) DA-DA310
- 4- Plain Stand (Low) DA-DA320
- 5- Base Plate with Casters DA-DA230

DP-3010 Specifications

General / Digital Copier (Standard)

Type	Desktop
Copy / Print Process	Laser Indirect Electrostatic
Developing Process	Dry Dual component
Warm-up Time	Approx. 30 sec.
First Copy Time	Approx. 4.5 sec. (Letter)
Resolution	up to 600 dpi
Grayscale	256 steps
Multi-Copy Speed ¹	up to 30 cpm
Maximum Original Size	Ledger
Copy Size	Ledger-Invoice
Copy Ratio	Enlargement (fixed) 200%, 155%, 129%, 121% Reduction (fixed) 79%, 77%, 65%, 61%, 50%
Zoom (variable)	25-400% (in 1% increments)
Automatic Document Feeder	50 sheets (Letter)
Paper Feed	Standard: 550 sheets paper tray unit x 2 + 50-sheet bypass Maximum: 2,250 sheets with option
Multiple Copy	1 to 999, Automatic reset to 1
Exposure Controller	Text, Text / Photo, Photo
Page Memory Capacity	32MB
Sort Memory	Uses JBIG Compression
Standard	16MB
Optional	Base Memory (16MB) plus 16MB / 64MB / 128MB (max. 144MB) 12GB (with optional HDD)
Power Requirements	AC 120 V, 60 Hz, 12 A
Power Consumption	Maximum: Less than 1.5 kW Energy Saver Mode: Approx. 28 Wh Sleep Mode: Approx. 1.8 Wh
Dimensions (W x D x H) ²	23.6" x 27.8" x 33.8"
(Excluding optional equipment)	(Including Automatic Document Feeder and ADF mounting bracket)
Weight (Excluding optional equipment) ³	Approx. 181 lbs (82 kg)

Network Printer (Standard) / Network Scanner (Option)

Printer Interface	Ethernet 10Base-T/100Base-TX, USB 1.1
Network Scanner Interface	Ethernet 10Base-T/100Base-TX
Printing Speed ¹	up to 30 ppm
Paper Size	Ledger-Invoice
Printing Resolution	up to 1,200 dpi equivalent x 600 dpi (PCL, PS), up to 600 dpi x 600 dpi (GDI)
Printer Memory	20MB
Page Description Language	PCL 5e, PCL 6, PostScript® 3 (option)
Scanning Resolution (Max.)	up to 600 dpi
Compatible Operating Systems	Windows® XP/2000, 98/Me, Windows NT® 4.0, Mac OS 8.6-10.1 (PS only)

G3 Fax (Option)

Compatibility	ITU-T Group 3, ECM
Modem Speed	33.6 kbps
Coding Scheme	JBIG / MMR / MR / MH
Transmission Speed	Less than 3 seconds/page ³
Scanning Speed	0.6 seconds (Letter portrait in Standard or Fine mode with ADF) ⁴
Scanning Resolution	Standard: 203 dpi x 98 lpi (8 dots/mm x 3.85 lines/mm) Fine: 203 dpi x 196 lpi (8 dots/mm x 7.7 lines/mm) Super Fine: 406 dpi x 391 lpi (16 dots/mm x 15.4 lines/mm) 600 dpi: 600 dpi x 600 dpi


Effective Scanning Width

Recording Resolution	600 x 600 dpi
Standard Memory	2MB (approx. 120 pages) ⁵
Optional Memory	Base memory plus 4MB (240 pages) ⁵ /8MB (480 pages) ⁵
Number of Auto Dialers	200 (Maximum 1,000 with optional HDD)

Scan-to-Email (Option) / Internet Fax (Option)

Compatibility	IETF RFC 2305, ITU-T T.37
Communication Protocol	TCP/IP, SMTP, POP3, MIME
Network Connectivity	10BASE-T / 100BASE-TX Ethernet (IEEE802.3)
Data Format	TIFF, Profile S/F/J, PDF

Dimensions

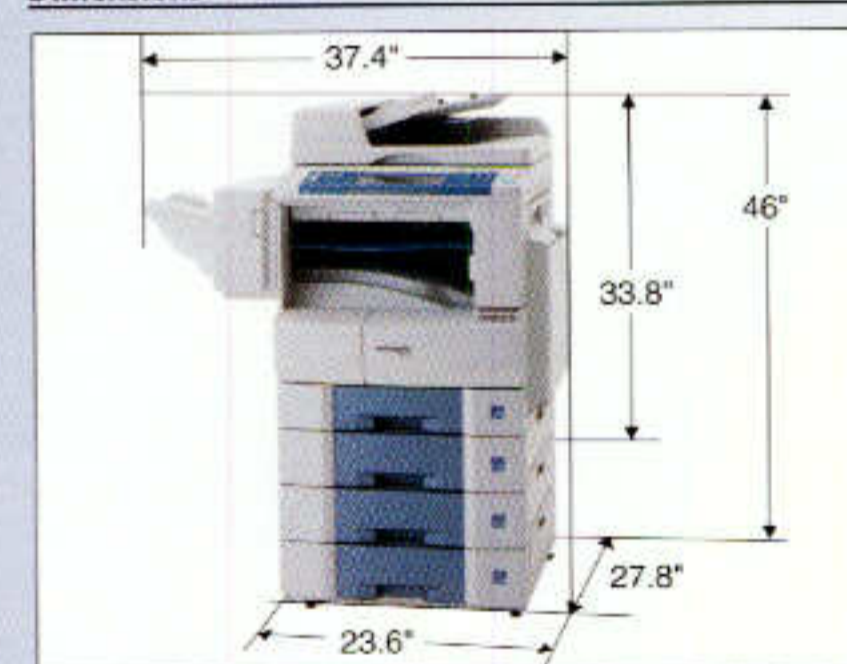

Notes

- ¹ Speeds are contingent upon applications, machine configuration, and status. Individual speeds may vary.
 - ² Dimensions and weight are approximate.
 - ³ Transmission time applies to memory transmission of text data using only ITU-T Image No.1 between the same models at maximum modem speed. Transmission time may vary in actual usage. Usually public telephone lines can only support communication speeds of 28.8 Kbps or lower. Via PBX, transmission speed may fall back to a lower speed.
 - ⁴ Scanning speed applies to the feeding process from the top to the end of a single page test chart. The time for the feeding process does not include the time that it takes for the top edge of the page to reach the scanning point and page ejection. Time for entire storing process is not applied.
 - ⁵ Based on ITU-T Image No.1 scanned in Standard mode.
 - ⁶ Design and specifications are subject to change without notice. Not all options may be available at the time of certification.
- Microsoft® Windows® and Windows NT® are registered trademarks of Microsoft Corporation.
Adobe® PostScript®, PDF and PostScript logo® are trademarks of Adobe Systems, Inc.
PCL® is a registered trademark of Hewlett-Packard.
WORKiO® is a registered trademark of Matsushita Electric Industrial Co., Ltd.
All other brand or product names are the property of their respective holders.

Panasonic®

Panasonic Digital Document Company
Unit of Matsushita Electric Corporation of America

Two Panasonic Way, Secaucus, NJ 07094
For a local dealer, please call 1-800-742-8086
<http://www.panasonic.com/office>

ISO 9001 Quality Management System

Our business processes which produce document, information and network products, from manufacturing to marketing, conform to ISO9001 Quality Management Systems standard. Design, development, manufacture, installation, repair and maintenance of document, information and network products, their associated devices and consumables.



As an Energy Star® Partner, Panasonic has determined that this product meets the Energy Star® Guidelines for energy efficiency.

PPC-DP-3010-SS